


FLEXO® REMIX

- Economical And Easy To Install
- Resists Gasoline, Engine Chemicals And Cleaning Solvents
- Cut And Abrasion Resistant
- FMVSS 302 Approval

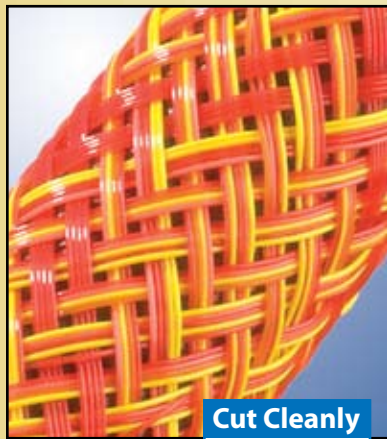

**Cut Cleanly
Hot Knife**

Material
Polyethylene Terephthalate

Grade
PTM

Monofilament Diameter
.010"

Drawing Number
TF001PET-WD

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
3/8"	PTM0.38	1/4"	5/8"	500'	125'	3	0.49
1/2"	PTM0.50	3/8"	3/4"	500'	100'	3	0.74
3/4"	PTM0.75	5/8"	1 1/4"	250'	75'	3	0.99
1 1/4"	PTM1.25	1 1/8"	1 3/4"	250'	65'	3	1.32
1 1/2"	PTM1.50	1 3/8"	2 1/2"	200'	40'	3	1.65

Flexo Pet ReMix - New, Random Construction

Our innovative construction process produces a unique visual effect while providing fuller coverage and enhanced protection. The same PET monofilaments we use for FLEXO® PET grade sleeving come alive in these new color combinations. Use Denim, Fire, and Camo to add pizzazz to any place you use sleeving. Flexo ReMix has a wide operating temperature range, is resistant to chemical degradation, and abrasion.

Used in electronics, automotive, marine and industrial wire harnessing applications where cost efficiency and durability are critical.


The unique braided construction and wide expandability allows quick and easy installation over large connectors and long runs.

High thermal and chemical resistance and new color combination make FLEXO® PET REMIX ideal for customizing and protecting the wires, hoses and cables.



Colors Available:
Denim (DE), Fire(FI) and Camo (CA).

Colors Available:
3 = DE, FI, CA.

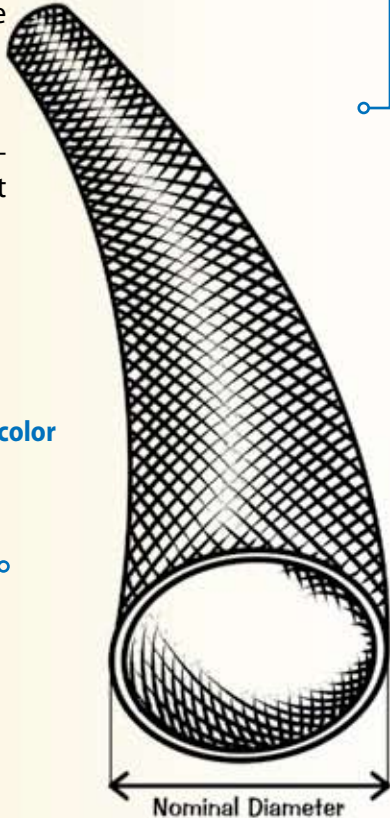

www.techflex.com
800.323.5140 • 973.300.9242 • fax: 973.300.9409
29 Brookfield Dr • Sparta, NJ 07871

FLEXO® REMIX



Abrasion Resistance
Medium

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g



Rating _____ **UL94VO, FAR25,**
FMVSS-302



Chemical Resistance


1=No Effect 4=More Affected
 2=Little Effect 5=Severely Affected
 3=Affected

Aromatic Solvents	_____	2
Aliphatic Solvents	_____	1
Chlorinated Solvents	_____	3
Weak Bases	_____	1
Salts	_____	1
Strong Bases	_____	2
Salt Water 0-S-1926	_____	1
Hydraulic Fluid MIL-H-5606	_____	1
Lube Oil MIL-L-7808	_____	1
De-Icing Fluid MIL-A-8243	_____	1
Strong Acids	_____	3
Strong Oxidants	_____	2
Esters/Keytones	_____	1
UV Light	_____	1
Petroleum	_____	1
Fungus ASTM G-21	_____	1
Halogen Free	_____	Yes
RoHS	_____	Yes
SVHC	_____	None

Melt Point
 ASTM D-2117
482°F (250°C)

Maximum Continuous
 Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

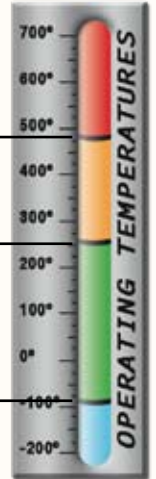

PHYSICAL PROPERTIES

Monofilament Diameter	_____	.010
ASTM D-204		
Flammability Rating	_____	UL94
FMVSS-302 Approved		
Recommended Cutting	_____	Hot Knife
Colors	_____	25
Wall Thickness	_____	.025
Tensile Strength (Yarn)	_____	7.5
ASTM D-2256 Lbs		
Specific Gravity ASTM D-792	_____	1.38
Moisture Absorption	_____	.1-.2
% ASTM D-570		
Hard Vacuum Data ASTM E-595 at 10-5 torr		
TML	_____	.19
CVCM	_____	.00
WVR	_____	.16
Smoke D-Max	_____	56
ASTM E-662		
Outgassing	_____	Med
Oxygen Index	_____	21
ASTM D-2863		

www.techflex.com