



HEAVY
DUTY



- **3,600 Cycles***
- **Outstanding Protection Against Abrasion & Cut-Through**
- **Resists Gasoline, Engine Chemicals, & Cleaning Solvents**
- **Does Not Trap Heat Or Humidity**
- **Resists Fraying When Cut With Scissors**

Cut Easily. Protect Confidently.

CLEAN CUT® HD (CCH) is perfect for heavy duty applications where there is no access to a hot knife.

This dual monofilament sleeve is constructed with 10 mil polyethylene terephthalate (PET) and 15 mil nylon 6-6 polyamide monofilament yarns for superior strength. For an extra level of protection, a resin coating is applied to offer improved abrasion, cut, and fray resistance. The open-weave construction expands to fit several application shapes and sizes, and also makes this sleeving highly flexible and resistant to trapping moisture, heat and humidity.

Clean Cut® HD is commonly used in military, marine, and industrial applications where additional abrasion and moisture protection is needed.

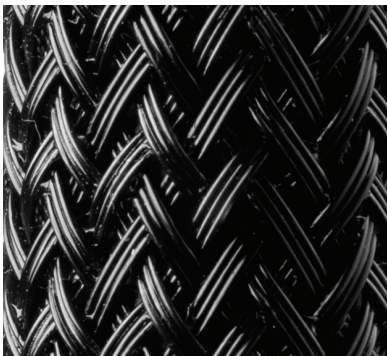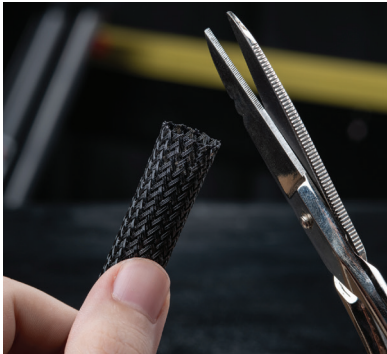

Nominal Size	Part #	Wall Thickness	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
			Min.	Max.	Bulk Spool	Shop Spool		
1/8"	CCH0.13BK	.0285"	1/8"	1/4"	1,000'	100'	Black (BK)	0.28
1/4"	CCH0.25BK	.0285"	1/8"	3/8"	1,000'	100'	Black (BK)	0.42
3/8"	CCH0.38BK	.0285"	1/4"	1/2"	500'	100'	Black (BK)	0.80
1/2"	CCH0.50BK	.0285"	3/8"	3/4"	500'	100'	Black (BK)	1.06
3/4"	CCH0.75BK	.0285"	3/4"	1 1/4"	250'	75'	Black (BK)	1.60
1"	CCH1.00BK	.0285"	1"	1 1/2"	250'	50'	Black (BK)	1.71
1 1/4"	CCH1.25BK	.0285"	1 1/4"	2 1/4"	250'	50'	Black (BK)	2.02
1 1/2"	CCH1.50BK	.0285"	1 1/2"	2 1/2"	200'	50'	Black (BK)	2.70
2"	CCH2.00BK	.0285"	2"	3 1/4"	100'	25'	Black (BK)	3.36

1 (833) SLEEVING
www.techflex.com

Abrasion Resistance						
630	950	2,500	*3,600	4,400	8,500	13,000
HIGH				EXTREMELY HIGH		

