



- **Shrink Temp. 347°F**
- **Mil-I-DTL-23053/13**
- **Flame Retardant**
- **Resistant to Highly Corrosive Acids, Fluids, Fuels, & Solvents**
- **High Operating Temp. 392°F for Extreme Working Conditions**

2:1 Viton® - Flexible Heatshrink Tubing

Viton® is a rubber-like, highly fluid-resistant, flame retardant fluoro-elastomer heat-shrinkable tubing with high solvent resistance. The product is recommended for bundling, harnessing, and environmental protection within engine compartments.

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/8"	H2V0.13BK	3.2mm	1.6mm	200'	100'	Black (BK)	1.26
3/16"	H2V0.19BK	4.8mm	2.4mm	200'	100'	Black (BK)	1.45
1/4"	H2V0.25BK	6.4mm	3.2mm	200'	100'	Black (BK)	1.68
3/8"	H2V0.38BK	9.5mm	4.7mm	200'	100'	Black (BK)	2.27
1/2"	H2V0.50BK	12.7mm	6.4mm	100'	50'	Black (BK)	2.29
5/8"	H2V0.63BK	16.0mm	8.0mm	100'	50'	Black (BK)	2.50
3/4"	H2V0.75BK	19.1mm	9.5mm	100'	50'	Black (BK)	4.14
7/8"	H2V0.88BK	22.4mm	11.0mm	50'	25'	Black (BK)	4.83
1"	H2V1.00BK	25.4mm	12.7mm	50'	25'	Black (BK)	5.73
1 1/4"	H2V1.25BK	31.7mm	15.7mm	50'	25'	Black (BK)	8.20
1 1/2"	H2V1.50BK	38.1mm	19.1mm	50'	25'	Black (BK)	8.80
2"	H2V2.00BK	50.8mm	25.4mm	50'	25'	Black (BK)	13.40

Viton® is a registered trademark of DuPont Performance Elastomers.



- **Shrink Temp. 194°F**
- **Flame Retardant**
- **Resists Common Automotive Chemicals**
- **Easily Installs Over Connectors & Splices**
- **Excellent Electrical Properties**
- **Protects from Fluids, Moisture, & Corrosion**


2:1, 3:1, 4:1, & 6:1 Dual Wall Adhesive Heatshrink Tubing

Dual wall adhesive-lined polyolefin heatshrink tubing is ideal for producing strong, weather tight seals on any heatshrink installation. During the application of heat from a heat gun or other heat source, the inner adhesive wall melts and flows, creating an adhesion layer to ensure a snug fit to your harness or connector. Adhesive lined heatshrink comes in 2:1, 3:1, 4:1, and 6:1 shrink ratio, and it is available in 4' sticks.

Dual Wall Adhesive Heatshrink Tubing


Shrinks to 1/2 its original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/ 10Pcs.
1/8"	H2A0.13	3.2mm	1.6mm	250	25	CL,BK	0.17
1/4"	H2A0.25	6.4mm	3.2mm	250	25	CL,BK	0.32
3/8"	H2A0.38	9.6mm	4.8mm	250	25	WH,RD,BK	0.55
1/2"	H2A0.50	12.7mm	6.4mm	200	25	CL,WH,RD,BK	0.73
3/4"	H2A0.75	19.1mm	9.6mm	80	25	WH,RD,BK	1.15
1"	H2A1.00	25.4mm	12.7mm	50	25	WH,RD,BK	1.53
1 1/2"	H2A1.50	38.1mm	19.1mm	15	5	BK	2.50

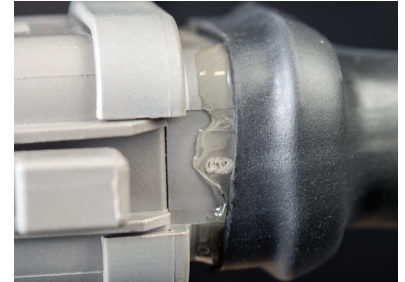

Shrinks to 1/3 its original diameter


Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/ 10Pcs.
1/8"	H3A0.13	3.0mm	1.0mm	250	25	CL,WH,RD,BK	0.26
3/16"	H3A0.19	4.8mm	1.5mm	250	25	CL,WH,RD,BK	0.31
1/4"	H3A0.25	6.0mm	2.0mm	250	25	CL,WH,RD,BK	0.35
3/8"	H3A0.38	9.0mm	3.0mm	250	25	CL,WH,RD,BK	0.55
1/2"	H3A0.50	12.0mm	4.0mm	200	25	CL,WH,RD,BK	0.75
3/4"	H3A0.75	19.0mm	6.0mm	80	25	CL,WH,RD,BK	1.65
1"	H3A1.00	24.0mm	8.0mm	50	25	CL,WH,RD,BK	2.15
1 1/2"	H3A1.50	38.0mm	13.0mm	25	5	CL,WH,RD,BK	4.40
2"	H3A2.00	50.0mm	17.0mm	15	5	CL,WH,RD,BK	5.25

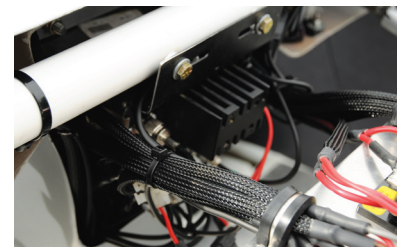

Seals and protects a wide variety of electrical applications, including wire splices, breakouts, and connectors-to-cable transitions.


Shrinks to 1/4 its original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/ 10Pcs.
3/16"	H4A0.19	4.0mm	1.0mm	250	25	CL,BK	0.30
5/16"	H4A0.31	8.0mm	2.0mm	250	25	CL,BK	0.44
1/2"	H4A0.50	12.0mm	3.0mm	200	25	CL,BK	0.90
3/4"	H4A0.75	16.0mm	4.0mm	80	25	CL,BK	1.50
1"	H4A1.00	24.0mm	6.0mm	50	25	CL,BK	2.60
1 1/4"	H4A1.25	32.0mm	8.0mm	25	5	CL,BK	3.50
2"	H4A2.00	52.0mm	13.0mm	15	5	CL,BK	8.00

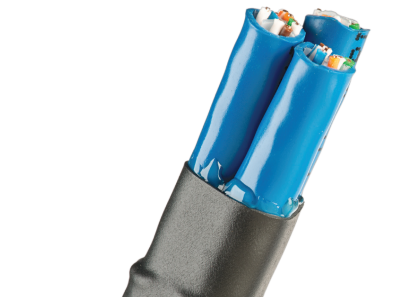

Shrinks to 1/6 its original diameter

Nominal Size	Part #	Unshrunk Diameter	Shrunk Diameter	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/ 10Pcs.
3/4"	H6A0.75BK	19.0mm	3.2mm	80	25	BK	2.74
1 3/8"	H6A1.38BK	33.0mm	5.5mm	50	25	BK	4.10
1 3/4"	H6A1.75BK	44.4mm	7.4mm	50	25	BK	4.32
2"	H6A2.00BK	50.8mm	8.3mm	15	5	BK	6.59
2 3/4"	H6A2.75BK	69.8mm	11.7mm	15	5	BK	7.50
3 1/2"	H6A3.50BK	88.9mm	17.1mm	10	5	BK	11.50
4 3/4"	H6A4.75BK	119.4mm	22.9mm	10	5	BK	14.50

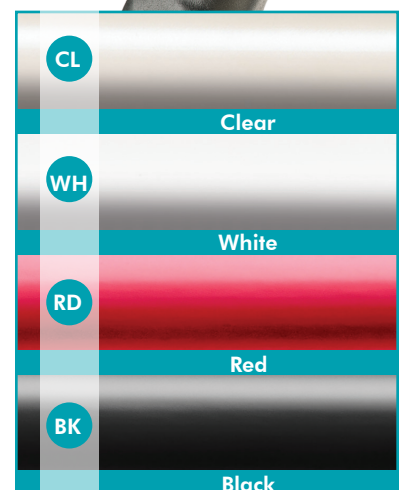

Contact your account representative for heatshrink cutting & printing services.

1 (833) SLEEVING
www.techflex.com