



HEAVY  
DUTY

- **950 Cycles\***
- **Braided from 15 mil PET Monofilament**
- **Extreme Abrasion & Cut Resistance**
- **UV Resistant**
- **Resists Gasoline, Solvents, Salt Water, and Chemicals**
- **Temp. Range -94°F to 257°F**
- **Melt Temp. 482°F**

## 50% Thicker For The Really Abrasive Jobs

When your application calls for more protection than our 10 mil products provide, our 15 mil FLEXO® HEAVY WALL (HWN) is the ideal solution.


HWN is commonly used in industrial and marine applications where extreme abrasion protection is critical. The durability of HWN makes it ideal for protecting hoses and cables that have to withstand constant contact with rough and abrasive surfaces.

HWN is the perfect solution for use on hoses, cables, and chains to protect painted or laminated surfaces from scuffing and wear.



Flexo® HWN quickly dries when exposed to moisture making it ideal for marine applications.

### MARINE INDUSTRY PROVEN

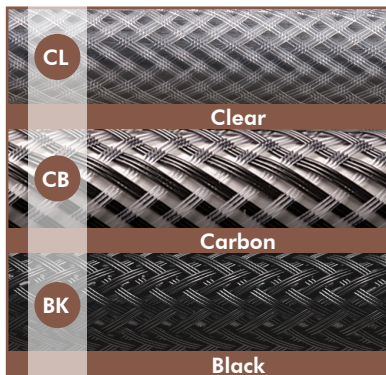

| Nominal Size | Part #    | Expansion Range |        | Standard Spool Put-Ups |            | Available Colors | Lbs/100' |
|--------------|-----------|-----------------|--------|------------------------|------------|------------------|----------|
|              |           | Min.            | Max.   | Bulk Spool             | Shop Spool |                  |          |
| 1/8"         | HWN0.13BK | 1/16"           | 3/16"  | 500'                   | 125'       | BK               | 0.27     |
| 3/8"         | HWN0.38   | 3/16"           | 3/4"   | 500'                   | 100'       | CL, CB & BK      | 0.82     |
| 5/8"         | HWN0.63   | 5/16"           | 7/8"   | 250'                   | 75'        | CL, CB & BK      | 1.10     |
| 1"           | HWN1.00   | 1/2"            | 1 1/2" | 250'                   | 50'        | CL, CB & BK      | 1.60     |
| 1 1/2"       | HWN1.50   | 3/4"            | 2"     | 250'                   | 50'        | CL, CB & BK      | 2.50     |
| 2"           | HWN2.00   | 1 1/2"          | 3"     | 200'                   | 50'        | CL, CB & BK      | 3.40     |
| 3"           | HWN3.00   | 2"              | 4"     | 100'                   | 50'        | CL, CB & BK      | 4.20     |
| 4"           | HWN4.00   | 2 1/2"          | 5 1/2" | 100'                   | 50'        | CL, CB & BK      | 4.20     |

1 (833) SLEEVING  
www.techflex.com

