




SILICONE COATED FIBERGLASS - GRADE A
UL RECOGNIZED · RATED TO 392°F, CLASS H
RESISTS ACIDS & MOST ORGANIC SOLVENTS · EXCELLENT LOW TEMP FLEXIBILITY

SILICONE FLEX GLASS (SG) sleeving is engineered with a silicone rubber coating over an insulating fiberglass sleeve. SG is very abrasion resistant and is ideal in heavy duty applications that require outstanding mechanical and electrical properties. The mechanical properties and high dielectric strength of SG make it the first choice in applications such as transformer lead protection, motor coil leads, component isolation, and power supply wiring. SG has a high tear strength, slight expandability for easy installation, excellent flex life and resistance to fatigue. Silicone shows no discernible effects under exposure of up to 10 megarads of radiation.

SIZING CHART

Nominal Size	Diameter	Part #	Grade	Wall Thickness	*Put-Ups		Available Colors	Lbs/ 100'
					M	L		
24	.022"	SGAG.24	A		250'	500'	3	
22	.027"	SGAG.22	A		250'	500'	3	
20	.034"	SGAG.20	A		250'	500'	3	
18	.042"	SGAG.18	A		250'	500'	3	
16	.053"	SGAG.16	A		250'	500'	3	
14	.066"	SGAG.14	A		250'	500'	3	
12	.085"	SGAG.12	A		100'	250'	3	
10	.106"	SGAG.10	A		100'	250'	3	
9	.118"	SGAG.09	A		100'	250'	3	
8	.133"	SGAG.08	A		100'	250'	3	
7	.148"	SGAG.07	A		100'	250'	3	
6	.166"	SGAG.06	A		25'	125'	3	
5	.186"	SGAG.05	A		25'	125'	3	
4	.208"	SGAG.04	A		25'	125'	3	
3	.234"	SGAG.03	A		25'	125'	3	
2	.263"	SGAG.02	A		25'	50'	3	
1	.294"	SGAG.01	A		25'	50'	3	
0	.330"	SGAG.00	A		25'	50'	3	
3/8"	.375"	SGA0.38	A		25'	50'	3	
7/16"	.438"	SGA0.44	A		25'	50'	3	
1/2"	.500"	SGA0.50	A		25'	50'	3	
5/8"	.625"	SGA0.63	A		25'	50'	3	
3/4"	.750"	SGA0.75	A		25'	50'	3	
7/8"	.875"	SGA0.88	A		25'	50'	3	
1"	1.00"	SGA1.00	A		25'	50'	3	

*Put-Ups: "M" = Shop Spool and "L" = Bulk Spool

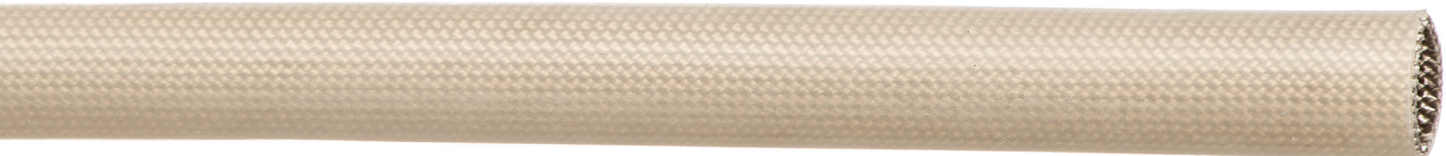

ELECTRICAL INSULATION

Technical Data Sheet



FEATURES

Material	Silicone Coated Fiberglass
Grade	A (8,000V)
Wall Thickness	
Drawing Number	TF001SGA-WD
Cutting	Scissors

CERTIFICATIONS



COLORS



White (WH), Natural (NT), Black (BK)

SPECIAL ORDER COLORS



Blue (BL), Yellow (YL), Red (RD)

FLAMMABILITY

Rating	UL
--------	----

OPERATING TEMPERATURES

Maximum Continuous	428°F / 220°C
Minimum Continuous	-103°F / -75°C

CHEMICAL RESISTANCE

Resists inorganic acids, alkalis and aliphatic hydrocarbons.

www.TECHFLEX.com

104 Demarest Road • Sparta, NJ 07871 • 1 (833) SLEEING • (973) 300-9242 • fax: (973) 300-9409

© 2023 Techflex® - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex® is strictly forbidden. Techflex® product names and logos are registered trademarks of Techflex®, unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex® makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex's® only obligations are those in standard terms of sale for these products and Techflex® will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions. Users should make their own evaluation to determine the suitability of these products for their unique and specific applications.

01-01-23