

- Shrink Temperature 248°F (120°C)
- Abrasion & Impact Resistance
- High Resistance To Chemicals And Oils
- Easily Installs Over Connectors And Splices
- Flame Retardant
- Meets Material Properties Of SAE-AMS-DTL 23053/15



Cut Cleanly
 Scissor

Material
 Polyolefin

Grade
 H6A

Put-Ups

Nominal Size	Part #	Wall Thickness /mm	Unshrunk Diameter /mm	Shrunk Diameter /mm	Bulk Box Put Up/4' Pcs.	Shop Box Put Up/4' Pcs.	Available Colors	Lbs/10Pcs.
3/4"	H6A0.75BK	3.2	19.0	3.2	80	25	Black BK	2.74
1 19/64"	H6A1.30BK	3.4	33.0	2.2	50	25	Black BK	4.10
1 3/4"	H6A1.75BK	3.6	44.4	7.4	50	25	Black BK	4.32
2"	H6A2.00BK	4.3	50.8	8.3	15	5	Black BK	6.59
2 3/4"	H6A2.75BK	4.8	69.8	11.7	15	5	Black BK	7.50
3 1/2"	H6A3.50BK	4.3	88.9	17.1	10	5	Black BK	11.50
4 45/64"	H6A4.70BK	4.8	119.4	22.9	10	5	Black BK	14.50

6:1 Dual Wall Adhesive Heatshrink Tubing Shrinks To 1/3 its original diameter!

Dual wall adhesive lined polyolefin heatshrink tubing is ideal for producing strong, weather tight seals on any heatshrink installation. During the application of heat from a heat gun or other heat source, the inner adhesive walls melts and flows, creating adhesion layer to ensure a snug fit to your harness or connector.

Adhesive lined heatshrink has 6:1 shrink ratio, and it is available in 4' strips.

Colors Available:
 Black (BK)



Seals and protects a wide variety of electrical applications, including wire splices, breakouts, and connectors-to-cable transitions.

FLAMMABILITY

Moisture Absorption % *ASTM D-570* _____ 0.5
 Flammability Rating _____ UL VW-1

CHEMICAL RESISTANCE

Corrosion *ASTM DTL-23053* _____ No Corrosion
 Fluid Resistance (73°F/ 23°C 24 hrs.) _____ 900min.



Slip the Shrinkflex® tubing over the bundle and position it so that both the sleeved and unsleeved portions are sufficiently covered. Notice the small pieces of tubing installed on single wires as part of a color coding system. If your project requires multiple operations, always work up from the smallest to the largest bundle.



Gently apply heat to Shrinkflex® tubing from a heat gun, hair dryer or torch with an appropriate attachment. Keep the heat source far enough away so that hot metal or direct flame does not come in contact with the tubing, wires or sleeving. Move the heat around the bundle to prevent damaging the sleeving and to ensure that all areas of the tubing have been shrunk. Once cooled, your installation is complete.




Measure the Shrinkflex® tubing to length and cut with a scissor. The thickness of your bundle, as well as the desired final appearance, will determine the length of the tubing you cut. Generally, a piece 1 1/2" - 2" long will accommodate almost any need. Single wires, or smaller bundles, require shorter pieces.

**Shrinks
248°F (120°C)**

**Maximum Continuous
Mil-DTL-23053
230°F (110°C)**

**Minimum Continuous
Mil-DTL-23053
-67°F (-55°C)**

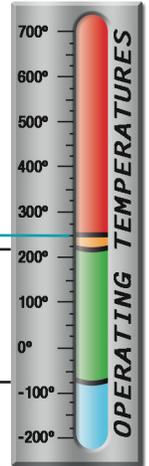

PHYSICAL PROPERTIES

Recommended Cutting _____ Scissors
 Colors _____ 1
 Tensile Strength PSI *ASTM D-638* _____ 1,500
 Elongation % *ASTM D-638* _____ 200
 Deformation % (316°F/158°C, 1 Hr.) _____ Max. 50
MIL-DTL-23053
 Heat Shock (482°F/ 250°C, 4 Hrs.) _____ No Cracking
MIL-DTL-23053
 Cold Bend (-67°F/-55°C, 4 Hrs.) _____ No Cracking
MIL-DTL-23053
 Flexibility (316°F/158°C, 168 Hrs.) _____ No Cracking
MIL-DTL-23053
 Secant Modulus PSI *MIL-DTL-23053* _____ 25,000
 Longitudinal Change % *MIL-DTL-23053* _____ +5, -15
 Dielectric Strength (volts/mil) *ASTM D-876* _____ 500
 Volume Resistivity (ohm-cm) *ASTM D-876* _____ 1.0 x 10¹⁴

www.techflex.com